


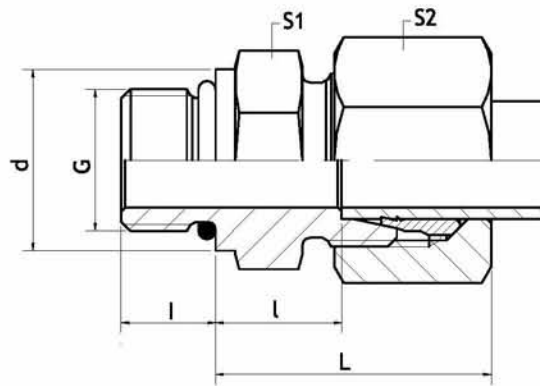

| 系列<br>Series | 钢管外径<br>Tube<br>φ O.D. | G       | 公称压力<br>Min. W.P.<br>(bar) | 最大工作压力<br>Max. W.P.<br>(bar) | S1 | S2 | L    | l    | l    | d    | O型圈<br>O-Ring | 重量<br>克/件<br>Wt.<br>g/p | 订货代号<br>Order No. |
|--------------|------------------------|---------|----------------------------|------------------------------|----|----|------|------|------|------|---------------|-------------------------|-------------------|
| L            | 06                     | M10x1   | 315                        | 500                          | 14 | 14 | 23.0 | 8.5  | 8.5  | 14.0 | OR8.1X1.6     | 26                      | D06L-ZM           |
|              | 08                     | M12x1.5 | 315                        | 500                          | 17 | 17 | 25.0 | 10.0 | 11.0 | 17.0 | OR9.3X2.2     | 40                      | D08L-ZM           |
|              | 10                     | M14x1.5 | 315                        | 500                          | 19 | 19 | 26.0 | 11.0 | 11.0 | 19.0 | OR11.3X2.2    | 51                      | D10L-ZM           |
|              | 12                     | M16x1.5 | 315                        | 400                          | 22 | 22 | 27.0 | 12.5 | 11.5 | 22.0 | OR13.3X2.2    | 72                      | D12L-ZM           |
|              | 15                     | M18x1.5 | 315                        | 400                          | 24 | 27 | 29.0 | 13.5 | 12.5 | 24.0 | OR15.3X2.2    | 102                     | D15L-ZM           |
|              | 18                     | M22x1.5 | 315                        | 400                          | 27 | 32 | 31.0 | 14.5 | 13.0 | 27.0 | OR19.3X2.2    | 148                     | D18L-ZM           |
|              | 22                     | M27x2   | 160                        | 250                          | 32 | 36 | 33.0 | 16.5 | 16.0 | 32.0 | OR23.6X2.9    | 194                     | D22L-ZM           |
|              | 28                     | M33x2   | 160                        | 250                          | 41 | 41 | 34.0 | 17.5 | 16.0 | 41.0 | OR29.6X2.9    | 270                     | D28L-ZM           |
|              | 35                     | M42x2   | 160                        | 250                          | 50 | 50 | 39.0 | 17.5 | 16.0 | 50.0 | OR38.6X2.9    | 434                     | D35L-ZM           |
|              | 42                     | M48x2   | 160                        | 250                          | 55 | 60 | 42.0 | 19.0 | 17.5 | 55.0 | OR44.6X2.9    | 239                     | D42L-ZM           |

|   |    |         |     |     |    |    |      |      |      |      |            |     |         |
|---|----|---------|-----|-----|----|----|------|------|------|------|------------|-----|---------|
| S | 06 | M12x1.5 | 630 | 900 | 17 | 17 | 28.0 | 13.0 | 11.0 | 17.0 | OR9.3X2.2  | 48  | D06S-ZM |
|   | 08 | M14x1.5 | 630 | 900 | 19 | 19 | 30.0 | 15.0 | 11.0 | 19.0 | OR11.3X2.2 | 64  | D08S-ZM |
|   | 10 | M16x1.5 | 630 | 900 | 22 | 22 | 31.0 | 15.0 | 12.5 | 22.0 | OR13.3X2.2 | 89  | D10S-ZM |
|   | 12 | M18x1.5 | 630 | 900 | 24 | 24 | 33.0 | 17.0 | 14.0 | 24.0 | OR15.3X2.2 | 110 | D12S-ZM |
|   | 16 | M22x1.5 | 400 | 630 | 27 | 30 | 37.0 | 18.5 | 15.0 | 27.0 | OR19.3X2.2 | 165 | D16S-ZM |
|   | 20 | M27x2   | 400 | 630 | 32 | 36 | 42.0 | 20.5 | 18.5 | 32.0 | OR23.6X2.9 | 271 | D20S-ZM |
|   | 25 | M33x2   | 400 | 630 | 41 | 46 | 47.0 | 23.0 | 18.5 | 41.0 | OR29.6X2.9 | 490 | D25S-ZM |
|   | 30 | M42x2   | 400 | 420 | 50 | 50 | 50.0 | 23.5 | 19.0 | 50.0 | OR38.6X2.9 | 650 | D30S-ZM |
|   | 38 | M48x2   | 315 | 420 | 55 | 60 | 57.0 | 26.0 | 21.5 | 55.0 | OR44.6X2.9 | 361 | D38S-ZM |

不带螺母和卡套时的订货代号示例: D10L-ZMX

如需不锈钢接头订货代号示例: D10L-ZM71

Code example for order without nut and ferrule: D10L-ZMX

Code example for order with stainless steel fitting: D10L-ZM71