


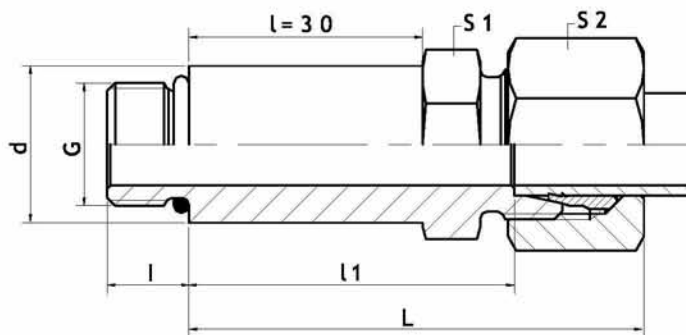

系列 Series	钢管外径 Tube φ O.D.	G	公称压力 Min. W.P. (bar)	最大工作压力 Max. W.P. (bar)	S1	S2	L	l1	l	d	O型圈 O-Ring	订货代号 (直通法兰体) Order No. (Directly way flange)
L	06	M10x1	315	500	14	14	50.5	36.0	8.5	14.0	OR8.1X1.6	D06L-ZM/30
	08	M12x1.5	315	500	17	17	52.5	37.5	11.0	17.0	OR9.3X 2.2	D08L-ZM/30
	10	M14x1.5	315	500	19	19	53.5	38.5	11.0	19.0	OR11.3X 2.2	D10L-ZM/30
	12	M16x1.5	315	400	22	22	54.5	40.0	11.5	22.0	OR13.3X 2.2	D12L-ZM/30
	15	M18x1.5	315	400	24	27	56.5	41.0	12.5	24.0	OR15.3X 2.2	D15L-ZM/30
	18	M22x1.5	315	400	27	32	58.5	42.0	13.0	27.0	OR19.3X 2.2	D18L-ZM/30
	22	M27x2	160	250	32	36	60.5	44.0	16.0	32.0	OR23.6X 2.9	D22L-ZM/30
	28	M33x2	160	250	41	41	61.5	45.0	16.0	41.0	OR29.6X 2.9	D28L-ZM/30
	35	M42x2	160	250	50	50	66.5	45.0	16.0	50.0	OR38.6X 2.9	D35L-ZM/30
	42	M48x2	160	250	55	60	69.5	46.5	17.5	55.0	OR44.6X 2.9	D42L-ZM/30

S	06	M12x1.5	630	900	17	17	55.0	40.0	11.0	17.0	OR9.3X2.2	D06S-ZM/30
	08	M14x1.5	630	900	19	19	57.0	42.0	11.0	19.0	OR11.3X2.2	D08S-ZM/30
	10	M16x1.5	630	900	22	22	58.0	42.0	12.5	22.0	OR13.3X2.2	D10S-ZM/30
	12	M18x1.5	630	900	24	24	60.0	44.0	14.0	24.0	OR15.3X2.2	D12S-ZM/30
	16	M22x1.5	400	630	27	30	64.0	45.5	15.0	27.0	OR19.3X2.2	D16S-ZM/30
	20	M27x2	400	630	32	36	69.0	47.5	18.5	32.0	OR23.6X2.9	D20S-ZM/30
	25	M33x2	400	630	41	46	74.0	50.0	18.5	41.0	OR29.6X2.9	D25S-ZM/30
	30	M42x2	400	420	50	50	77.0	50.5	19.0	50.0	OR38.6X2.9	D30S-ZM/30
	38	M48x2	315	420	55	60	84.0	53.0	21.5	55.0	OR44.6X2.9	D38S-ZM/30

不带螺母和卡套时的订货代号示例: D10L-ZM/30X ("/30" 随l的变化而变化, 若当l=40时,

不带螺母和卡套时的订货代号示例: D10L-ZM/40X)

如需不锈钢接头订货代号示例: D10L-ZM/3071

Code example for order without nut and ferrule: D10L-ZM/30X ("/30" is changed with the change of l ; when l is equal to 40, Code example for order without nut and ferrule is D10L-ZM/40X)

Code example for order with stainless steel fitting: D10L-ZM/3071